

ACE

Lorry Loaders

Articulated & Straight Boom
Truck Mounted Cranes

ACE INDIA'S NO. 1
MOBILE & TOWER CRANE CO.



Nothing beats an **ACE**






Specifications - Articulated Booms

AB63 / AB813 / AB113

Description	Unit	AB63	AB813	AB113
Maximum Lifting Moment	Tm	6	8	10
Maximum Hydraulic reach				
Horizontal	m	9.0	9.6	9.6
Vertical	m	12.0	12.2	12.2
Hydraulic System				
Recommended oil flow	ltr/min	38	38	38
Rated pressure	Bar	270	270	270
Tank Capacity	Ltr	60	90	90
Slewing System - Rotation				
Slewing angle	deg	360 (cont.)	360 (cont.)	360 (cont.)
Slewing moment	kNm	14	17	17
Max. Working heel	% (deg)	8.7 (5°)	8.7 (5°)	8.7 (5°)
Operating Speed in unloaded condition.				
Slewing speed (min.)	(%)sec	6°	6°	6°
Slewing moment	m/min	10	10	10
Max. Working heel	cm/sec	15	15	15
Outrigger span				
Normal	m	2.05	2.16	2.16
Expanded	m	4.20	4.50	4.50
Lifting attachment				
Lifting Hook	Tm	3.15	4.75	4.75



Specifications - Articulated Booms

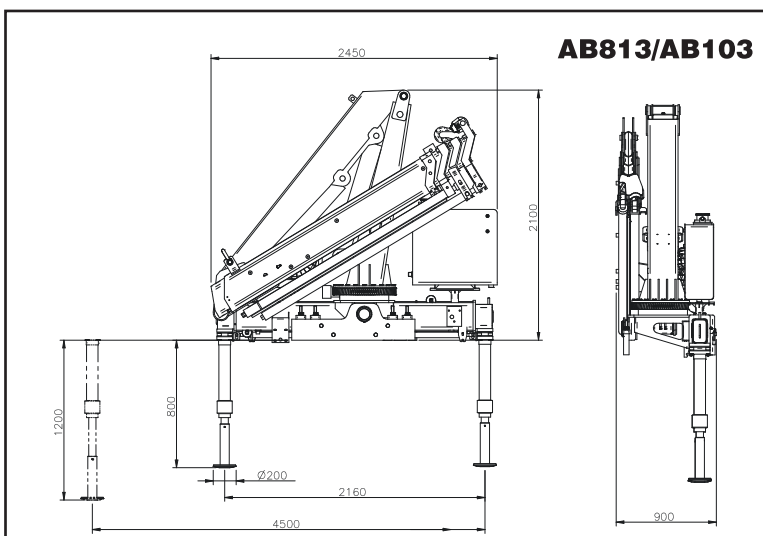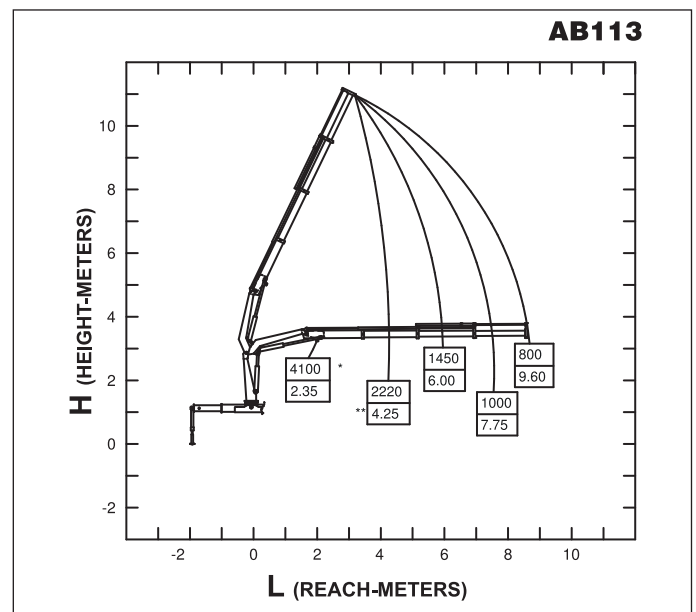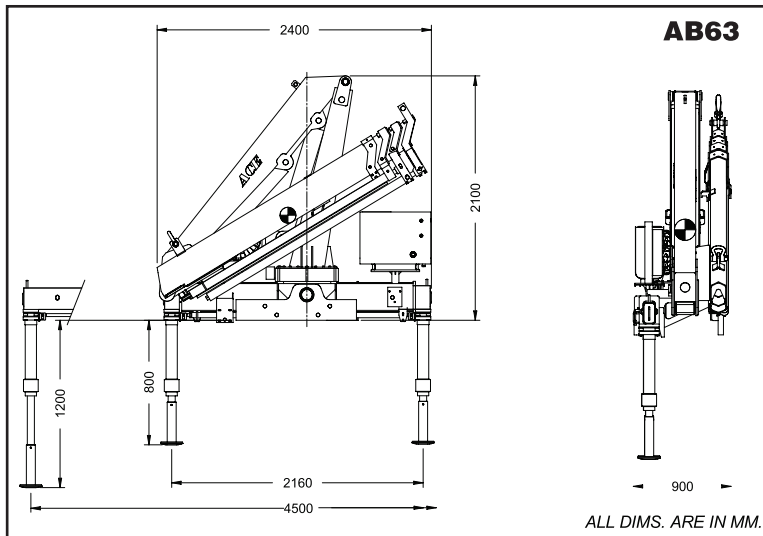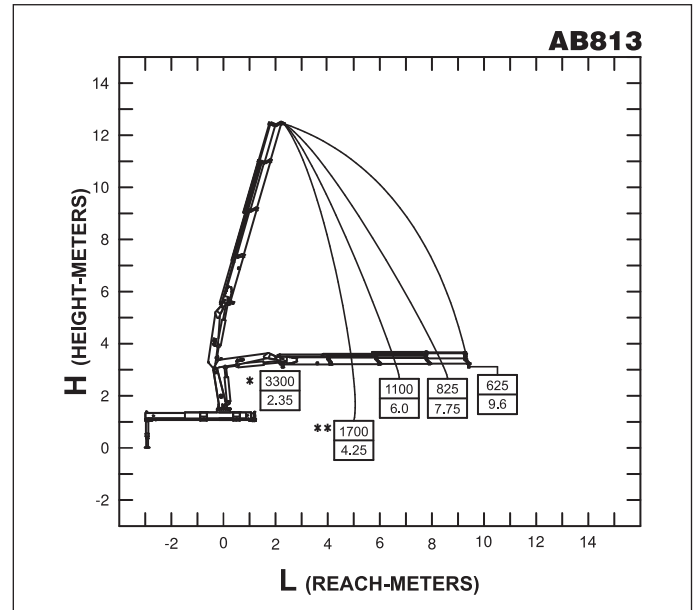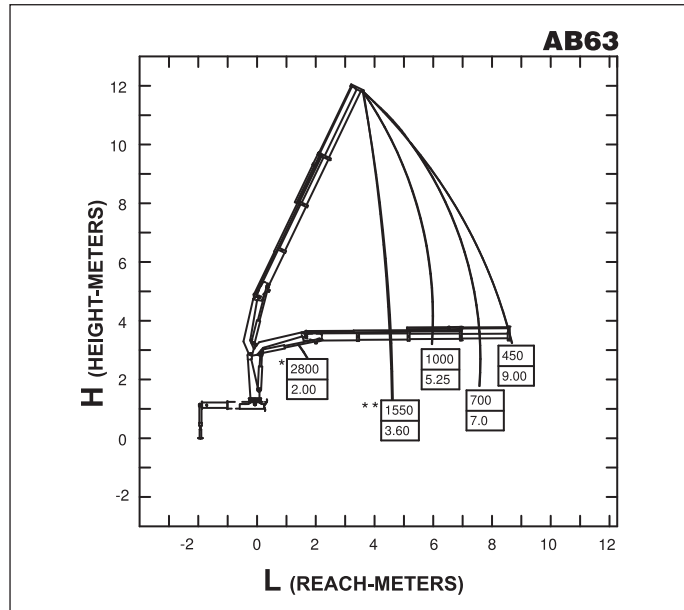

Note : Load chart is valid only if outriggers are fully deployed on both side.

* Max. nominal capacity with fixed hook. ** Max. capacity from horizontal to vertical.

Specifications - Articulated Booms

AB163 / AB203

Description	Unit	AB163	AB203
Maximum Lifting Moment	Tm	15.0	19.0
Maximum Hydraulic reach			
Horizontal	m	10.20	10.20
Vertical	m	14.05	14.05
Hydraulic System			
Recommended oil flow	ltr/min	40	40
Rated pressure	Bar	280	280
Tank Capacity	Ltr	150	150
Slewing System - Rotation			
Slewing angle	deg	360 (cont.)	360 (cont.)
Slewing moment	kNm	21	25
Max. Working heel	% (deg)	8.7 (5°)	8.7 (5°)
Operating Speed in unloaded condition.			
Slewing speed (min.)	(%)sec	6°	6°
Slewing moment	m/min	10	12
Max. Working heel	cm/sec	15	15
Outrigger span			
Normal	m	2.30	2.30
Expanded	m	5.10	5.10
Lifting attachment			
Lifting Hook	T	7.0	7.0

• Optional Features / Attachments :




- Emergency Hand Pump
- Remote Control (wireless / wired)
- Spark Arrestor
- Winch Assembly
- Man Carrying Basket

- Grab Attachment
- Manual Extension
- Brick block attachment


- The mounting of the crane can be accommodated width wise on different make of Trucks Chassis with appropriate GVW.



Specifications - Articulated Booms

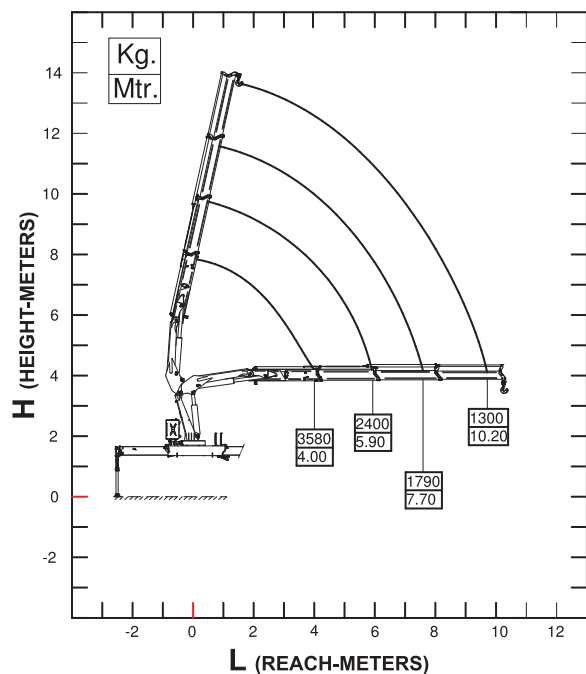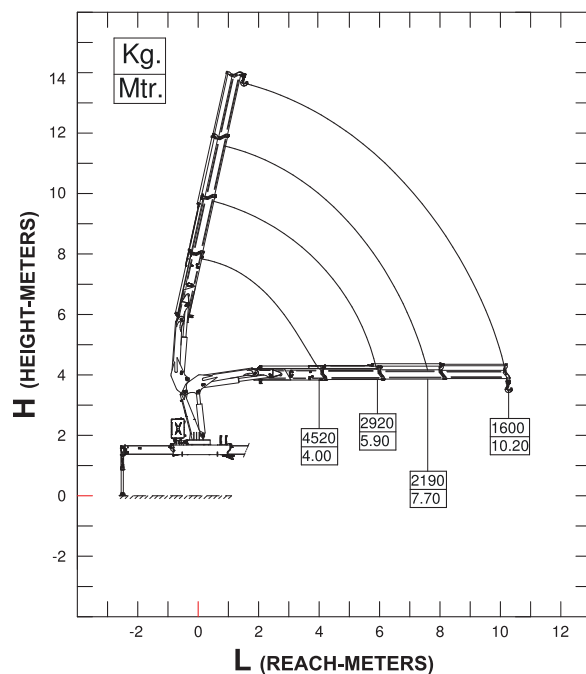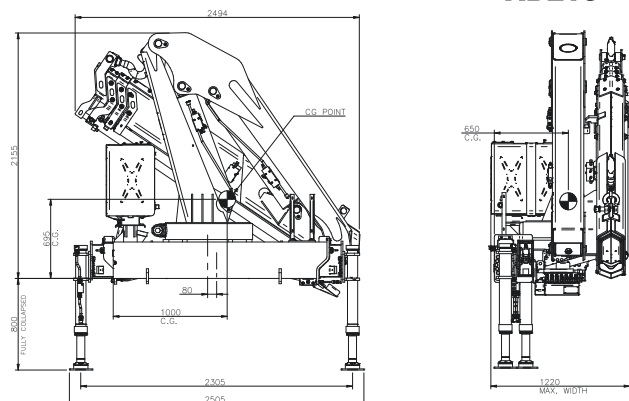AB163**AB203****AB213**

ALL DIMS. ARE IN MM.

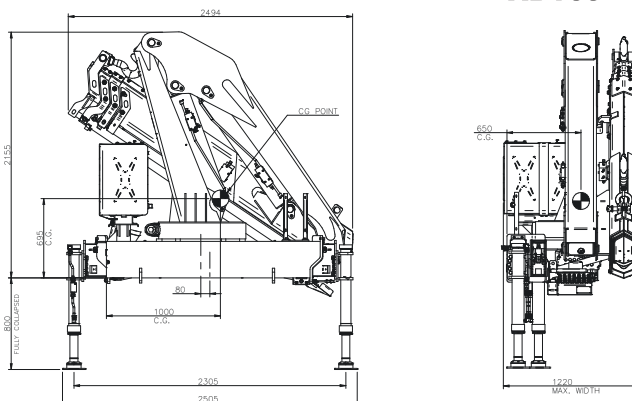**AB163**

ALL DIMS. ARE IN MM.



NOTE: Load chart is valid only if outriggers are fully deployed on both sides.

Specifications - Straight Booms

SB813 / SB123 / SB163 / SB203

Description	Unit	SB813	SB123	SB163	SB203
Maximum Lifting Moment	kNm (Tm)	8.0	12.0	16.0	20.0
Maximum Hydraulic reach					
Horizontal	m	7.5	8.2	9.9	9.9
Vertical	m	10.4	11.0	13.1	13.1
Hydraulic System					
Recommended oil flow	ltr/min	38	40	40	40
Rated pressure	Bar	270	280	280	280
Tank Capacity	Ltr	90	150	150	150
Slewing System - Rotation					
Slewing angle	deg	360 (cont.)	360 (cont.)	360 (cont.)	360 (cont.)
Slewing moment	kNm	17	21	21	25
Max. Working heel	% (deg)	8.7 (5°)	8.7 (5°)	8.7 (5°)	8.7 (5°)
Operating Speed in unloaded condition.					
Slewing speed (min.)	(%)sec	6°	6°	6°	6°
Slewing moment	m/min	10	10	10	10
Max. Working heel	cm/sec	15	15	15	15
Outrigger span					
Normal	m	2.16	2.30	2.30	2.30
Expanded	m	4.50	5.10	5.10	5.10
Lifting attachment					
Lifting Hook	T	4.75	6.0	8.0	8.0
Hoisting System					
Single Line Pull		1500	1500	2500	2500
Rope Dia.		13	13	13	13

- **Safety Features :**
 - Safe Load Indicators
 - Load Moment Device
 - Dual Over Center Valve
 - Single Over Center Valve
 - Pilot Operated Valve
- **Optional Features :**
 - Emergency Hand Pump
 - Safe Load Indicator




SB 813

RATED LIFTING CAPACITIES

Side and Rear			
RADIUS	FULLY CLOSED 3.3 Mtrs. Kgs.	BOOM EXTENDED 5.4 Mtrs. Kgs	BOOM EXTENDED 7.5 Mtrs. kgs
Mtrs.	Kgs.	Kgs.	Kgs.
2.0	3300	3050	2350
2.5	3200	3050	2300
3.0	2700	2490	2135
3.5	2430 (3.3m)	2060	1780
4.0	—	1760	1500
5.0	—	1360	1150
6.0	—	1240 (5.4m)	950
7.0	—	—	740
7.5	—	—	700

REACH AND HEIGHT DIAGRAM

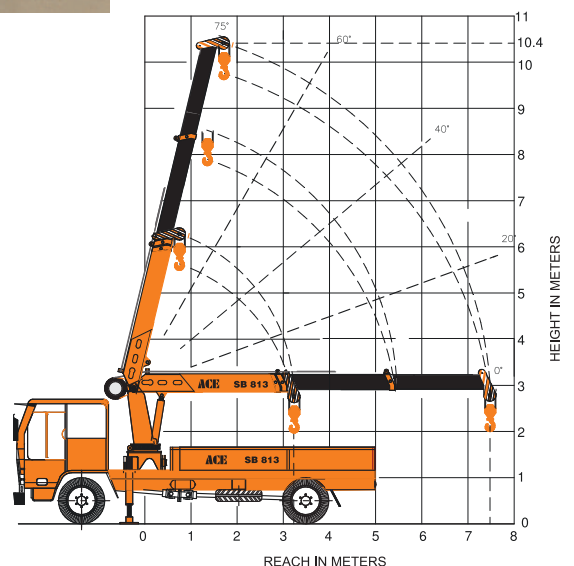

Specifications - Straight Booms


SB123

RATED LIFTING CAPACITIES

Side and Rear


RADIUS	FULLY CLOSED 3.5 Mtrs.	BOOM EXTENDED 5.87 Mtrs.	BOOM EXTENDED 8.2 Mtrs.
Mtrs.	Kgs.	Kgs.	Kgs.
2.0	6000	—	—
2.5	5100	4100	3400
3.0	4100	3600	3150
3.5	3550	3275	3100
4.0	—	3050	3000
5.0	—	2280	2320
6.0	—	1910(5.8m)	1800
7.0	—	—	1500
8.2	—	—	1280

REACH AND HEIGHT DIAGRAM

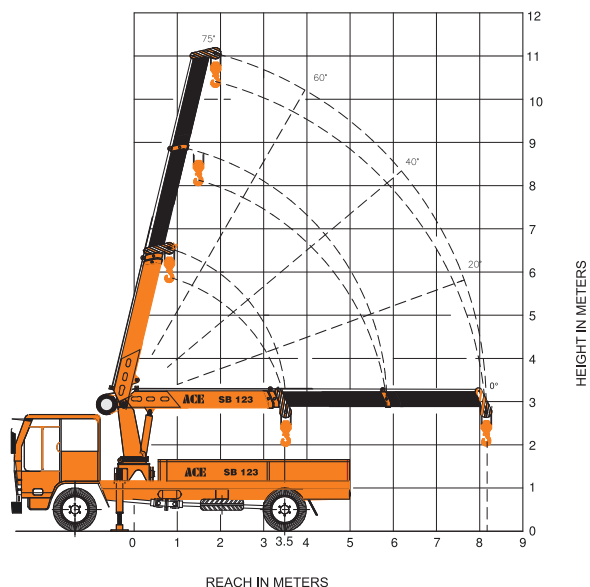

SB 163

REACH AND HEIGHT DIAGRAM

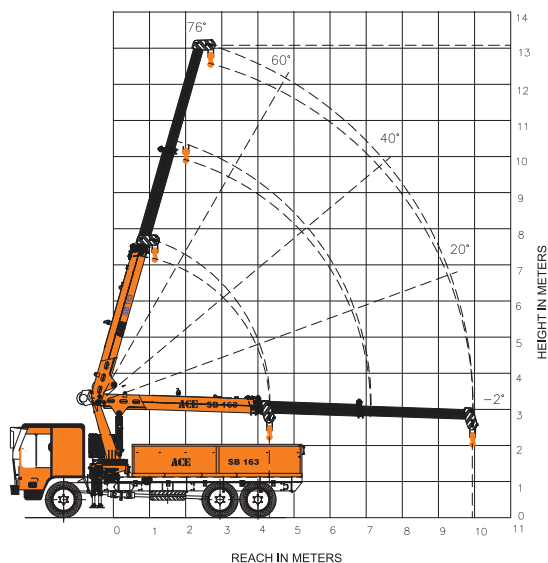


RATED LIFTING CAPACITIES

Side and Rear

RADIUS	FULLY CLOSED 4.3 Mtrs.	BOOM EXTENDED 7.1 Mtrs.	BOOM EXTENDED 9.9 Mtrs.
Mtrs.	Kgs.	Kgs.	Kgs.
2.0	7500	6200	—
2.5	6400	5600	4000
3.0	5340	4660	3750
3.5	4580	4000	3500
4.0	4125	3620	3340
4.5	3750 (4.3m)	3250	3000
5.0	—	3070	2780
6.0	—	2590	2420
7.0	—	2030	1865
8.0	—	—	1700
9.0	—	—	1600
9.9	—	—	1270

SB 203

REACH AND HEIGHT DIAGRAM

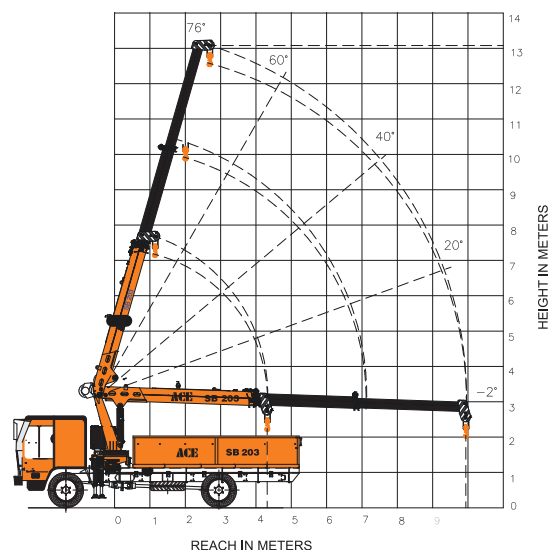


RATED LIFTING CAPACITIES

Side and Rear

RADIUS	FULLY CLOSED 4.3 Mtrs.	BOOM EXTENDED 7.1 Mtrs.	BOOM EXTENDED 9.9 Mtrs.
Mtrs.	Kgs.	Kgs.	Kgs.
2.0	8000	7000	—
2.5	8000	6300	4850
3.0	6400	5600	4400
3.5	5490	4900	4100
4.0	4950	4350	3900
4.3	4500	3900	3600
5.0	—	3500	3300
6.0	—	3100	2900
7.0	—	2600	2400
8.0	—	—	2100
9.0	—	—	1900
9.9	—	—	1500

ALL INDIA NETWORK

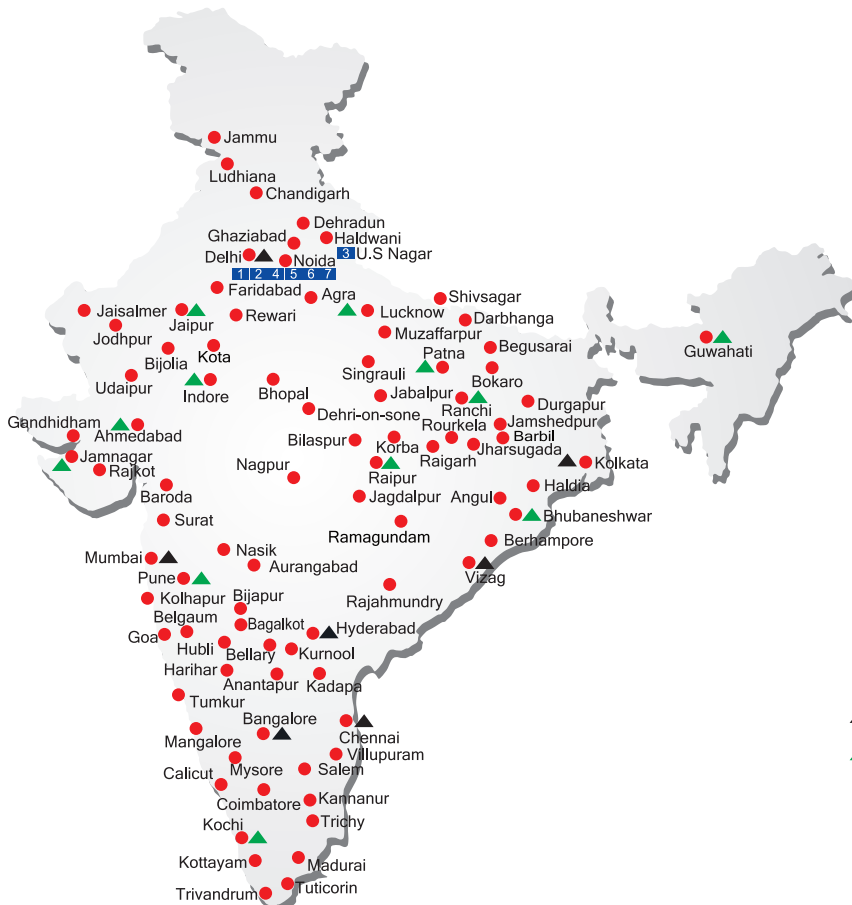

SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Cochin.

CUSTOMER CARE

TOLL FREE No

1800 1800 004

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS



Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by $\pm 5\%$. Accessories if shown are not part of the Standard Equipment.

MARKETING H.Q.

4th Floor, Pinnacle, Suraj Kund, NCR-121009
E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola, Palwal-121102, Haryana
Ph.: +91-1275-280111, Fax: +91-1275-280133
CIN : L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 74
Ph.: +91-22-25206846, 25207070, Telefax: 25207071
E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor, AJC Bose Road,
Kolkata - 14. Ph.: +91-33-65012050
E-mail: acekolkata@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road,
Alwar Pet, Chennai - 18
Ph.: +91-44-24314253, Telefax: 24314252
E-mail: acechennai@ace-cranes.com

