

SS 75

Rough terrain and rugged skid steer loader

SKID STEER LOADER






Specifications

SKID STEER LOADER SS 75

CAPACITY		
Rated capacity	750 kgs	
Tipping Load	1500 kgs	
Bucket Capacity	0.4 cum	
DIESEL ENGINE	ACE A50 Bharat (TREM) Stage III A /CEV BSIII/ TIER 2, 3 Cylinder water cooled, Natural Aspiration, 50HP @2100 RPM Diesel engine OR Simpson TSJ436, 4 Cylinder, water cooled,	
	Turbo charged diesel Engine CEV BS-III , 60 HP@ 2200 RPM OR Simpson TSJ436, 4 Cylinder, water cooled, Turbo charged diesel Engine CEV BS-III , 75 HP@ 2200 RPM	
TRANSMISSION	Infinitely variable hydrostatic drive	
Top Speed	10 KMPH	
Gradeability	20°	
HYDRAULIC SYSTEM		
Controls	Servo controls-4 way Joystick	
Hydrostatic Drive	 Variable displacement axial piston pump (Tandem) and radial piston motor. 	
Main Pump	Gear Pump	
	● 82 LPM flow (@2100 RPM)	

BRAKES Service Parking	Closed loop hydrostatic brakes Fail safe multi disc brakes	
ELECTRICAL SYSTEM	12 V Negative ground system	
TYRES	10-16.5 10 PR	
FLUID CAPACITIES		
Fuel Tank	55 ltrs.	
Hydraulic Tank	65 ltrs.	
Engine	8-11 ltrs (Depending on types of Engine)	
STANDARD EQUIPMENTS	ROPS cabin	
	 Hydraulic Control system 	
ATTACHMENTS	Backhoe	
	● 6 in 1 bucket	
	Ripper Tooth	
	 Ditch cleaning bucket 	
	Rock Breaker	
	Trencher Average Observer Planage	
	Auger/ Stump Planer Superpar Collector	
	Sweeper CollectorPallet Fork	
	Snow blower	
	Chain/Rubber Tracks	
	 Industrial grapple 	
OPERATING WEIGHT	2850 Kgs (Nominal)	

S NO	PARAMETER	VALUES
1	Height at Maximum Extension	4220 mm
2	Hinge Pin Height	3150 mm
3	Total Height	2110 mm
4	Length with Bucket	3620 mm
5	Length with out Bucket	2650 mm
6	Width with Bucket	1645 mm
7	Track Width	1340 mm
8	Wheelbase	1010 mm
9	Ground Clearance	185 mm
10	Dumping Angle	40°
11	Dumping Height	2290 mm
12	Maximum Reach	680 mm
13	Roll back at Ground	22°

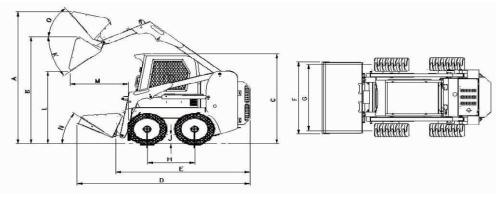

Note: Dimensions are given for loader equipped with standard tires and bucket. It may be different with other bucket types, All dimensions shown in millimeters and are controlled with in ±3%.

ACE reserves the right to change Specifications without prior notice.

ADD



1 6 IN 1 BUCKET



2 INDUSTRIAL GRAPPLE



3 CHAIN/RUBBER TRACKS



4 TRENCHER



5 SWEEPER COLLECTOR



6 DITCH CLEAN BUCKET



7 RIPER TOOTH



8 PALLET FORK



9 BACKHOE



10 AUGER



11 ROCK BREAKER



12 SNOW BLOWER



SPARE PARTS & SERVICE

ACE has all India Sales and Service network operating out of all the major cities. These outlets are fully equipped to provide genuine spare parts and services by company trained engineers. These outlets are further supported by company officials based at Delhi, Mumbai, Chennai, Kolkatta, Ahmedabad, Surat, Pune, Jaipur, Chandigarh, Ranchi, Raipur, Indore, Bhubneshwar, Lucknow, Jamnagar, Hyderabad, Bangalore, Guwahati, Patna, Vizag & Kochi.

CUSTOMER CARE TOLL FREE NO

1800 1800 004

- WORKS
- ▲ REGIONAL OFFICES
- ▲ AREA OFFICES
- SALES AND SERVICE DEALERS

















Action Construction Equipment Ltd.

Contact:



ACE reserves the right to alter any specifications without prior notice. Dimensions, weights & capacities mentioned herein are variable by \pm 5%. Accessories if shown are not part of the Standard Equipment.

MARKETING H.Q.

4th Floor, Pinnacle, Surajkund, NCR-121009 Ph.:+91-129-4550000, Fax:+91-129-4550022 E-mail: marketing@ace-cranes.com

REGISTERED OFFICE

Dudhola Link Road, Dudhola, Palwal-121102, Haryana Ph.: +91-1275-280111, Fax: +91-1275-280133 CIN: L74899HR1995PLC053860

MUMBAI OFFICE

31, "Kalpataru Court", Chembur, Mumbai - 400074 Ph.: +91-22-25206846, 25207070, Fax: +91-22-25207071 E-mail: acemumbai@ace-cranes.com

KOLKATA OFFICE

"Forma Towers" 84-A, Second Floor, AJC Bose Road, Kolkata - 700014. Ph.: +91-33-65012050 E-mail: acekolkatta@ace-cranes.com

CHENNAI OFFICE

1st Floor, "Alsa Regency", 165, Eldams Road, Alwar Pet, Chennai - 600018 Ph.: +91-44-24314253, Fax: +91-44-24314252 E-mail: acechennai@ace-cranes.com

















